


CHAIRS

Foam Padded Top (FP) Round





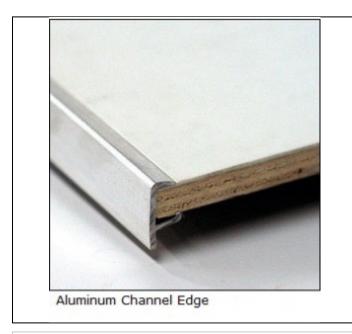

Specs

Overview

Foam tops are constructed of 5/8" thick plywood, sanded and smoothed, without voids and patches. A 1/8" expanded vinyl sheet is permanently bonded to the top.

The locking mechanism snaps into a locked position when table legs are fully extended. Legs made from 1 I/2" square, 20 gauge steel tubing. Leg assembly secured to the angle iron rails with I/4" steel rivets.

Features

All metal parts are black powder coated.

Metal glide caps standard.

Aluminum Edge