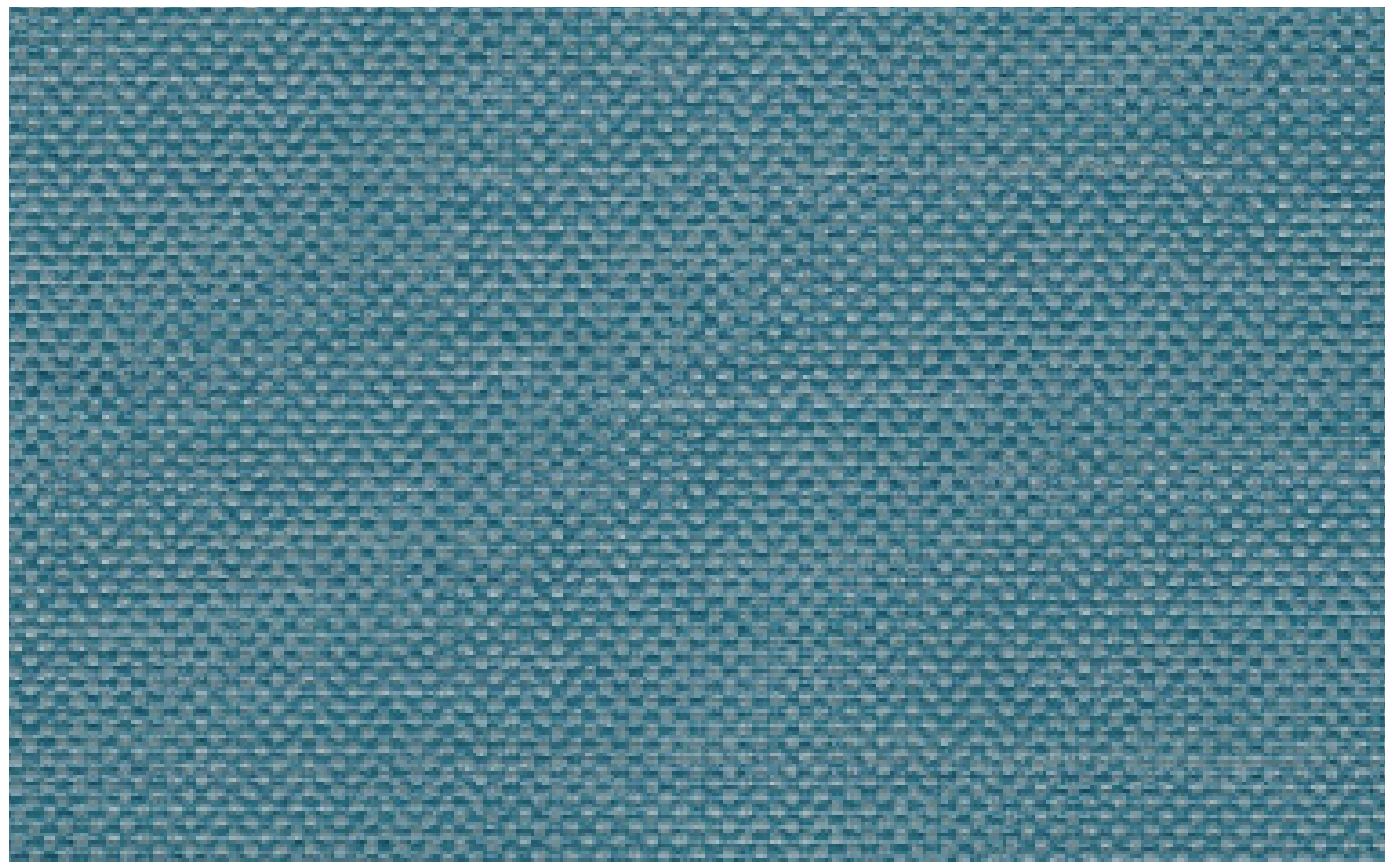
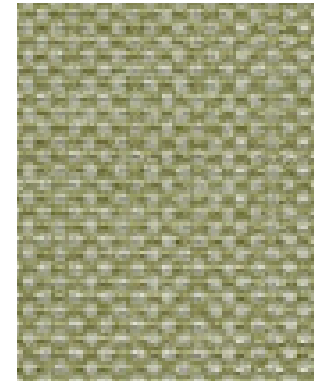
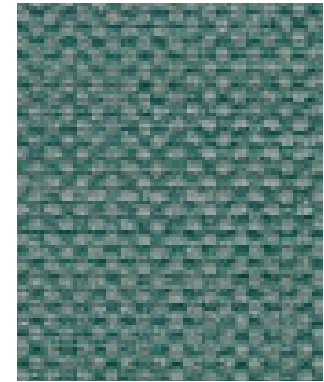
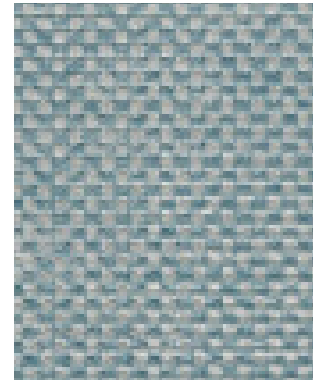
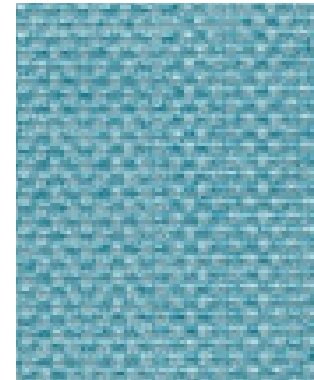
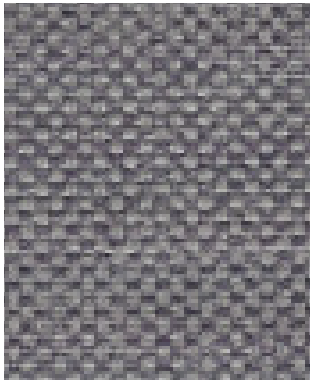
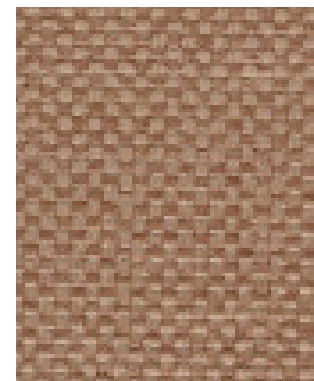
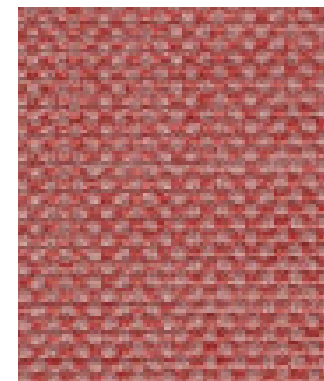
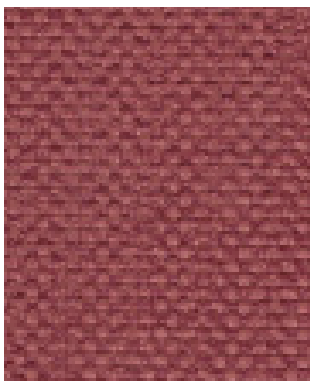
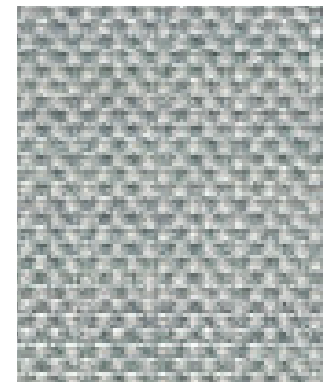
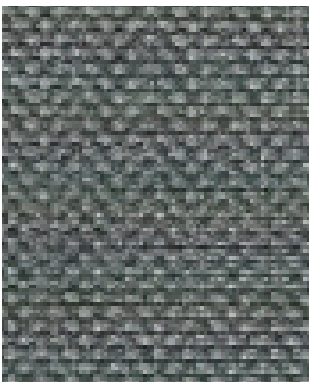


MAG-1951
DESERTMAG-1952
SAPPHIREMAG-1953
VANILLAMAG-1954
SAGEMAG-1955
VIRIDIANMAG-1956
AEGEANMAG-1957
SKYMAG-1958
AQUAMAG-1959
INDIGOMAG-1960
WISTERIAMAG-1961
GOLDENRODMAG-1962
CLAYMAG-1963
CORALMAG-1964
ROSEMAG-1965
DRIFTWOODMAG-1966
TRUFFLEMAG-1967
ALASKAMAG-1968
THUNDER

MAGLIA™

Content

Vinyl

Backing

100% Polyester Hi-Loft²™

Finishes

PERMABLOK³®
ADVANCED VINYL PROTECTION

Characteristics

No Phthalates

No Fire Retardants

No Biocides

Anti-static
ASTM D-257

Sulfide Stain Resistant
Fisher Body TM 31-12

Formaldehyde Free

No Heavy Metals

Performance

Superior Abrasion
CFFA I, ASTM D-4157-02
100,000 cycles, Wyzenbeek #10 Cotton Duck

UV Stability
Xenotest: AATC TM 16-3/ CFFA-2 A1
1,000 Hours

Cold Crack -10°F
CFFA-6A



This fabric meets or exceeds these
ACT performance guidelines.
*Certification Marks owned by ACT®

Flame Retardancy*

California T.B. 117 - 2013

NFPA 260 - Class I

UFAC - Class I

*This term and any corresponding data refer to the
typical performance in the specific tests indicated
and should not be construed to imply the behavior
of this or any other material under actual fire
conditions.

Our vinyls, when tested with suitable component
materials, may comply with California Technical
Bulletin 133.

Specifics

Weight: 30 oz.

Width: 54 in.

Roll Size: 30 yd.

Applications

☐ Automotive | RV

☒ Education

☒ Healthcare

☒ Office

Hospitality

☒ Hotel | Motel | Casino

☒ Restaurant

☒ Theaters | Convention Centers

Marine

☒ Interior

☐ Exterior

Residential

☒ Interior

☐ Exterior

