
Yosemite

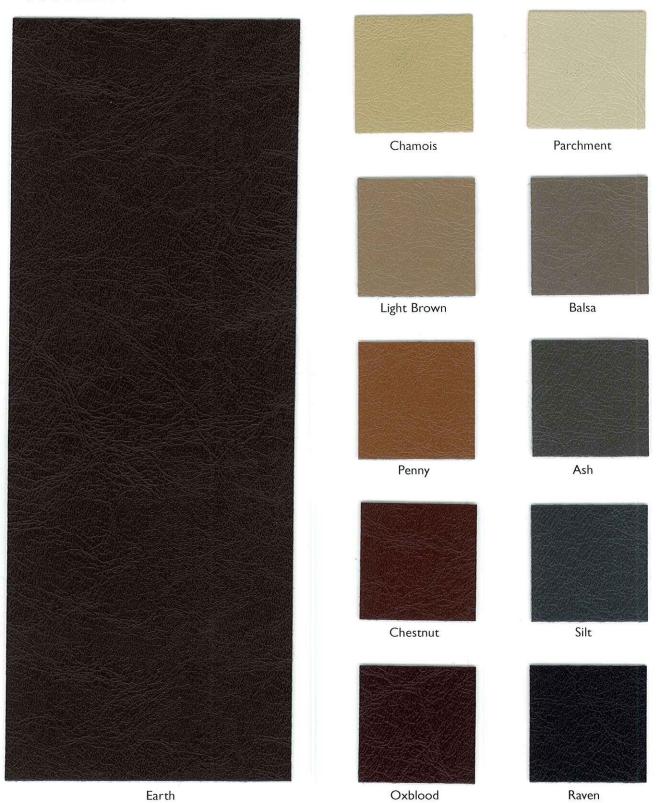

Yosemite

Content:

100% Polyurethane

Backing:

70% Polyester, 30% Cotton

Finish:

Antimicrobial

Weight:

22.12 oz. per linear yard

Width:

54"

Performance

Abrasion:

Heavy Duty – Exceeds 100,000 Cycles (Wire Screen Abradent) (ASTM D4157)

Light Fastness:

Class 4/40 hrs. min. (AATCC16A)

Color Fastness:

Class 4 (ASTM D3597, AATCC8) Wet Class 4 (ASTM D3597, AATCC8) Dry

Physical Properties:

Class 5 (ASTM D3511) Brush Pill

85 lbs. warp, 81 lbs. weft (ASTM D5034) Breaking Strength 61 lbs. warp, 68 lbs. weft (ASTM D4034) Seam Slippage

ISO 1419 - Pass 5 weeks

Flammability

Passes:

California Tech. Bulletin #117-2013

UFAC Class I NFPA 260 Class I MVSS 302 Pass

Care

Cleanability:

WS – Both water and solvent based solutions. Bleach Cleanable – 5:1 water/bleach solution.

This fabric is made in China.

For samples or further information, please contact:

Culp, Inc. Contract Fabrics 1823 Eastchester Drive High Point, NC 27265 Phone: (336) 889-5161 Fax: (336) 889-7848

www.culpcontract.com

CULP CONTRACT

4-28-2016